
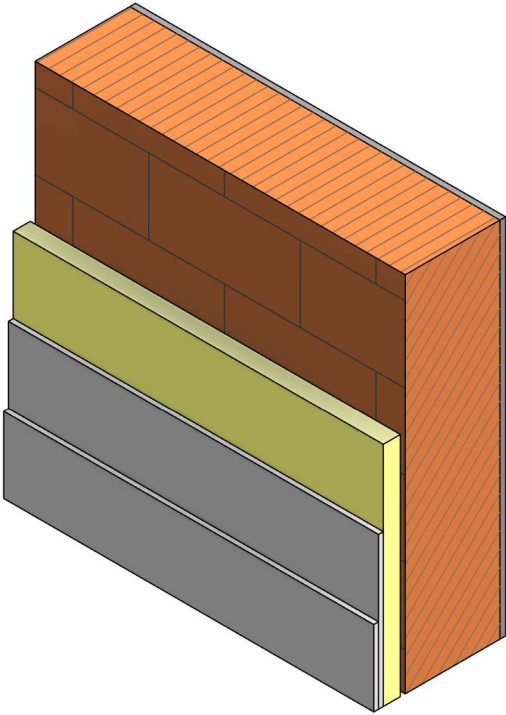
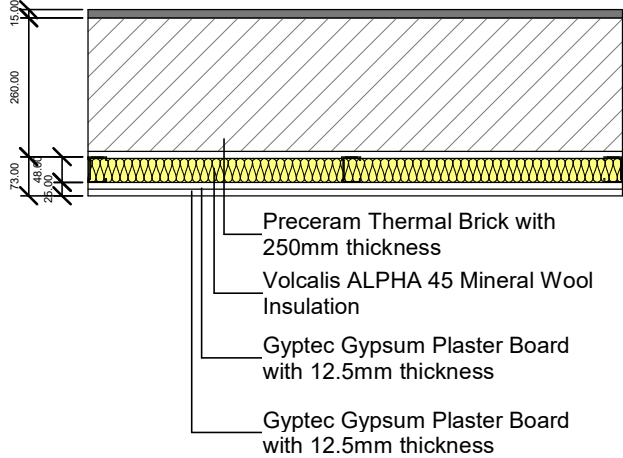


Wall Schedule Components quantities																										
Manufacturer	Type	Area m²	Laminated gypsum plasterboard m² / m²	Laminated gypsum plasterboard Total	Metal frame Raia 48 m / m²	Metal frame Raia 48 Total	Metal frame Montante 48 m / m²	Metal frame Montante 48 Total	Acoustic Tape 48 m / m²	Acoustic Tape 48 Total	Paper tape m / m²	Paper tape Total	Paste GR2 kg / m²	Paste GR2 Total	Screw PM25 un / m²	Screw PM 25 Total	Screw PM35 un / m²	Screw PM 35 Total	Mineral wool ALPHA 45 m² / m²	Minera Wool ALPHA 45 Total	Mortar kg/m²	Mortar Total	Cement plaster kg/m²	Cement Total	Bricks un/m²	Bricks Total
GYPTEC	GYPTEC-REVESTIMENTO 73 BA13A + PRECERAM-PRO25	1.00	2.10	2.10	0.95	0.95	2.10	2.10	0.95	0.95	3.00	3.00	0.7	0.7	7	7	14	14	1.06	1.06	25	25	24	24	12.5	12.5

LEED Certification - Product Composition					
Component's name or material	% by weight	Preconsumer recycled %	Postconsumer recycled %	Extraction site	Manufacturer's site
Gypsum	95.2	10	40	Sines PRT	Sines PRT
Paper	4.8	-	100	Lleida ESP	Lleida ESP
GYPTec_BA13A gypsum board 12.5mm					

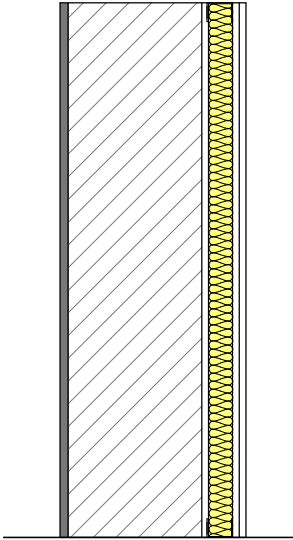

GYPTec 73 BA13A - PRECERAM PRO25
09/2024
V0.1

Wall Schedule													
Manufacturer	Type	Brick Type	Plasterboard type	Function	Description	Type Comments	Weight kg/m²	Fire Rating	Acoustic Insulation	Area m²	Maximum Height m	Cost / m²	Total Cost
GYPTEC	GYPTEC-REVESTIMENTO 73 BA13A + PRECERAM-PRO25	PRO25	BA13A	Exterior	SPAR 348/600 [2X13A+48-TTA25] MW45	Solution for masonry walls in thermal and acoustic bricks Preceram 40x19x25 (PRO25), with external plaster and interior wall lining, consisting of self-supporting structure with horizontal metal profiles RAIA 48 and vertical metal profiles MONTANTE 48, spaced every 600 mm, on which 2 layers of Gyptec BA13A (STANDARD) plasterboards are fixed. Volcalis ALPHA mineral wool in the cavity space. Surfaces ready for final finishing of painting or decoration. PT: Solução para paredes de alvenaria em tijolo térmico e acústico Preceram 40x19x25 (PRO25), com reboco exterior e revestimento interior de paredes, constituída por estrutura autoportante com perfis metálicos horizontais RAIA 48 e verticais MONTANTE 48, afastados a cada 600 mm, na qual são fixadas 2 camadas de placas Gyptec BA13A (STANDARD). Lã mineral Volcalis ALPHA no espaço de ar. Massas, bandas para juntas e acessórios de fixação. Superfícies prontas para acabamento final de pintura ou decoração.	218.55	Ei 180	67	1.00	7.5	0.00	0.00