


Wall Schedule Components quantities																				
Type	Area m²	Plasterboard type	Laminated gypsum plasterboard m² / m²	Laminated gypsum plasterboard Total	Metal frame Raia 70 m / m²	Metal frame Raia 70 Total	Metal frame Montante 70 m / m²	Metal frame Montante 70 Total	Acoustic Tape 70 m / m²	Acoustic Tape 70 Total	Paper tape m / m²	Paper tape Total	Paste GR2 kg / m²	Paste GR2 Total	Screw PM25 un / m²	Screw PM 25 Total	Screw PM35 un / m²	Screw PM 35 Total	Mineral Wool ALPHA 60 m² / m²	Mineral Wool ALPHA 60 Total
GYPTEC-REVESTIMENTO 95 BA13Protect	1.00	BA13Protect	2.10	2.10	0.95	0.95	2.10	2.10	0.95	0.95	3.00	3.00	0.7	0.7	7	7	14	14	1.06	1.06

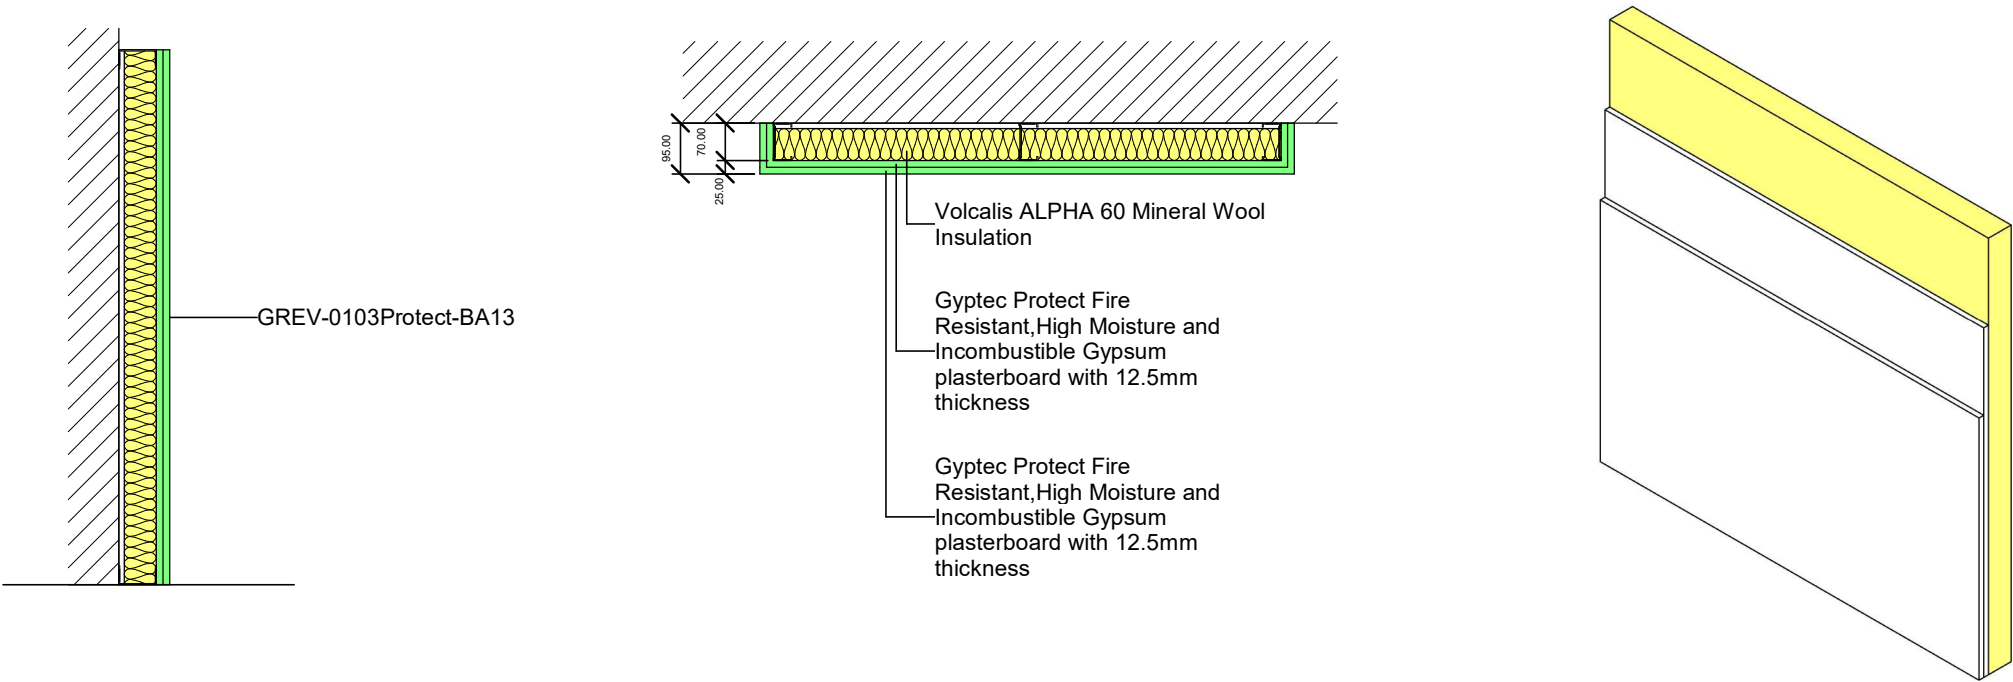

REVESTIMENTO 95 BA13Protect
09/2024
V0.2

Wall Schedule											
Manufacturer	Type	Function	Description	Type Comments	Weight kg/m²	Fire Rating	Maximum Height m	Acoustic Insulation: Rw	Area m²	Cost /m²	Total Cost
GYPTEC	GYPTEC-REVESTIMENTO 95 BA13Protect	Interior	GREV 95/600 [2x13Protect+70] MW60	Solution for interior wall lining, consisting of self-supporting structure with horizontal metal profiles RAIA 70 and vertical metal profiles MONTANTE 70, spaced every 600 mm, on which 2 layers of Gyptec BA13Protect (PROTECT) plasterboards are fixed. Volcalis ALPHA mineral wool in the cavity space. Surfaces ready for final finishing of painting or decoration. PT:Solução para revestimento interior de paredes, constituída por estrutura autoportante com perfis metálicos horizontais RAIA 70 e verticais MONTANTE 70, afastados a cada 600 mm, na qual são fixadas 2 camada de placas Gyptec BA13Protect (PROTECT). Lã mineral Volcalis ALPHA no espaço de ar. Massas, bandas para juntas e acessórios de fixação. Superfícies prontas para acabamento final de pintura ou decoração.	29.5	EI 60	3.20	41	1.00	0.00	0.00