


Wall Schedule Components quantities																									LEED Certification - Product Composition							
Manufacturer	Type	Area m²	Laminated gypsum plasterboard m² / m²	Laminated gypsum plasterboard Total	Metal frame Raia 70 m / m²	Metal frame Raia 70 Total	Metal frame Montante 70 m / m²	Metal frame Montante 70 Total	Acoustic Tape 70 m / m²	Acoustic Tape 70 Total	Paper tape m / m²	Paper tape Total	Paste GR2 kg / m²	Paste GR2 Total	Screw PM25 un / m²	Screw PM 25 Total	Screw PM35 un / m²	Screw PM 35 Total	Mineral wool ALPHA 60 m² / m²	Minera Wool ALPHA 60 Total	Mortar kg/m²	Mortar Total	Cement plaster kg/m²	Cement plaster Total	Bricks un/m²	Bricks Total	Component's name or material	% by weight	Preconsumer recycled %	Postconsumer recycled %	Extraction site	Manufacturer's site
																											Gypsum	95.2	10	40	Sines PRT	Sines PRT
																											Paper	4.8	-	100	Lleida ESP	Lleida ESP
GYPTEC_BA13A gypsum board 12.5mm																																
GYPTEC	GYPTEC-REVESTIMENTO 95 BA13A + PRECERAM-PRO20	1.00	2.10	2.10	0.95	0.95	2.10	2.10	0.95	0.95	3.00	3.00	0.7	0.7	7	7	14	14	1.06	1.06	25	25	24	24	12.5	12.5						

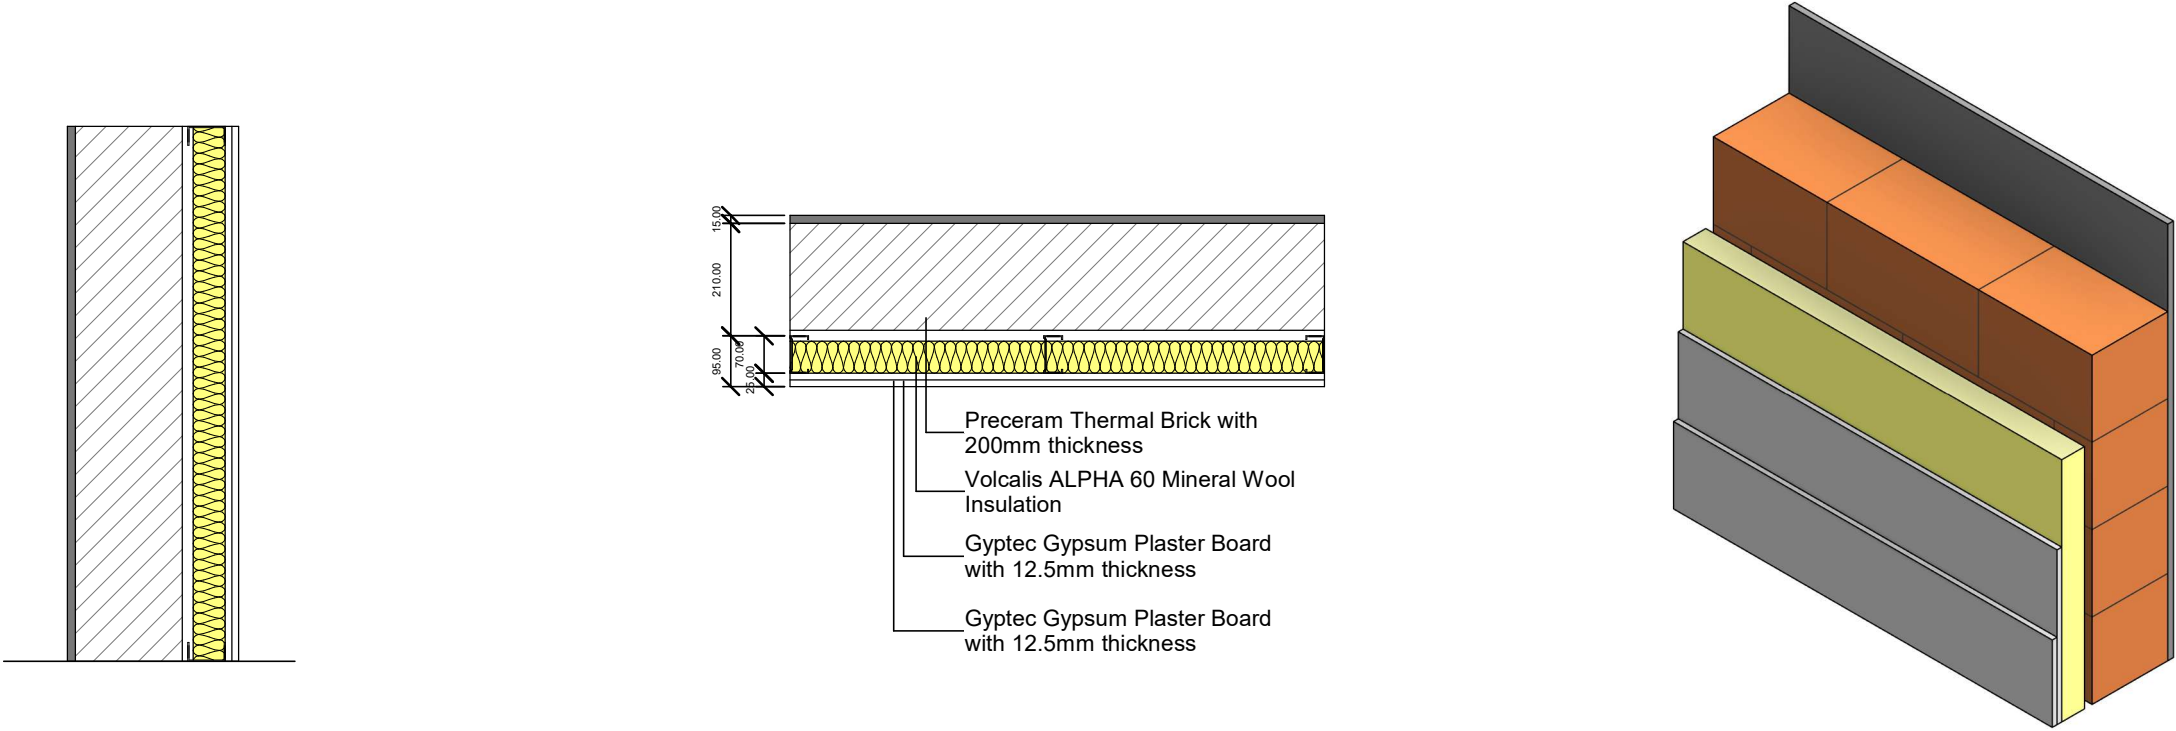

GYPTEC 95 BA13A - PRECERAM PRO20
09/2024
V0.1

Wall Schedule													
Manufacturer	Type	Brick Type	Plasterboard type	Function	Description	Type Comments	Weight kg/m²	Fire Rating	Acoustic Insulation	Area m²	Maximum Height m	Cost / m²	Total Cost
GYPTEC	GYPTEC-REVESTIMENTO 95 BA13A + PRECERAM-PRO20	PRO20	BA13A	Exterior	SPAR 320/600 [2x13A+70-TTA20] MW60	Solution for masonry walls in thermal and acoustic bricks Preceram 40x19x20 (PRO20), with external plaster and interior wall lining, consisting of self-supporting structure with horizontal metal profiles RAIA 70 and vertical metal profiles MONTANTE 70, spaced every 600 mm, on which 2 layers of Gyptec BA13A (STANDARD) plasterboards are fixed. Volcalis ALPHA mineral wool in the cavity space. Surfaces ready for final finishing of painting or decoration. PT: Solução para paredes de alvenaria em tijolo térmico e acústico Preceram 40x19x20 (PRO20), com reboco exterior e revestimento interior constituído por estrutura autoportante com perfis metálicos horizontais RAIA 70 e verticais MONTANTE 70, afastados a cada 600 mm, na qual são fixadas 2 camada de placas Gyptec BA13A (STANDARD). Lã mineral Volcalis ALPHA no espaço de ar. Massas, bandas para juntas e acessórios de fixação. Superfícies prontas para acabamento final de pintura ou decoração.	185.45	EI 180	67	1.00	6	0.00	0.00