



Preceram Thermal Brick with 200mm thickness

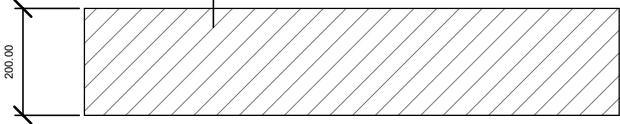

Preceram Thermal Brick with 200mm thickness

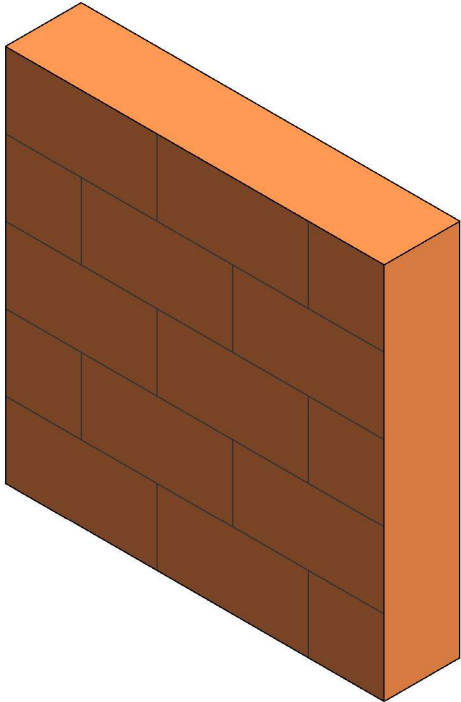

Tijolo Térmico PRO20 - 40x19x20
09/2024
V0.1

Wall Schedule

Manufacturer	Type	Function	Description	Type Comments	Brick Type	Fire Rating	Acoustic Insulation	Area m²	Bricks un/m²	Bricks Total	Mortar kg/m²	Mortar Total	Weight kg/m²	Maximum Height m	Cost /m²	Total Cost
PRECERAM	PRECERAM - Tijolo Térmico 40x19x20 - PRO20	Exterior	SPAR 200 [TTA20]	Solution for masonry walls in thermal and acoustic bricks Preceram 40x19x20 (PRO20), applied with laying mortar on the interrupted horizontal joint and dry half bond vertical joint. PT: Solução para paredes de alvenaria em tijolo térmico e acústico Preceram 40x19x20 (PRO20), aplicado com argamassa de assentamento na junta horizontal interrompida e junta vertical seca contrafiada.	PRO 20	EI 180	46	1.00	12.5	12.5	25	25	166.25	6	0.00	0.00