
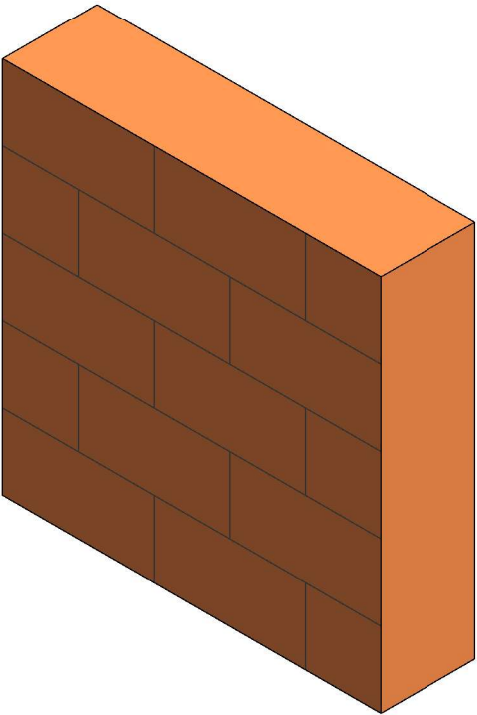
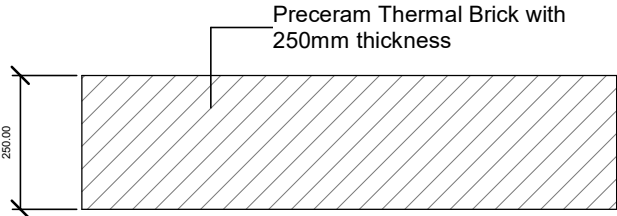


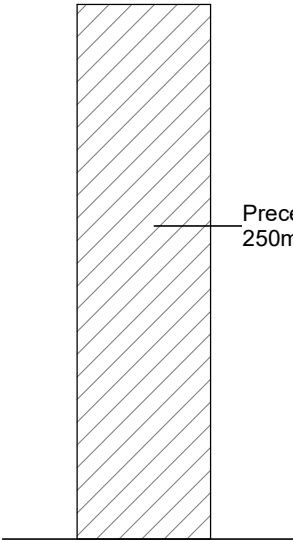

Tijolo Térmico PRO25 - 40x19x25
09/2024
V0.1

Wall Schedule

Manufacturer	Type	Function	Description	Type Comments	Brick Type	Fire Rating	Acoustic Insulation	Area m²	Bricks un/m²	Brick Total	Mortar kg/m²	Mortar Total	Weight kg/m²	Maximum Height m	Cost /m²	Total Cost
PRECERAM	PRECERAM - Tijolo Térmico 40x19x25 - PRO25	Exterior	SPAR 250 [TTA25]	Solution for masonry walls in thermal and acoustic bricks Preceram 40x19x25 (PRO25), applied with laying mortar on the interrupted horizontal joint and dry half bond vertical joint. PT: Solução para paredes de alvenaria em tijolo térmico e acústico Preceram 40x19x25 (PRO25), aplicado com argamassa de assentamento na junta horizontal interrompida e junta vertical seca contrafiada.	PRO 25	EI 180	47	1.00	12.5	12.5	33.3	33.3	194.55	7.5	0.00	0.00